




DOONAN® BLACK GOLD™

FLATBED COIL HAULER

BETTER TRAILER STABILITY – MORE SECURE TRANSPORT OF COILS

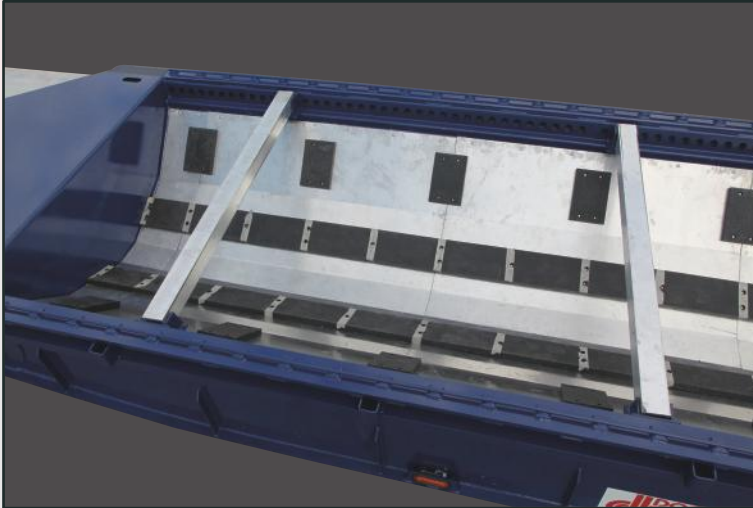

Coils are generally some of the toughest freight to haul because of their concentrated weight on the trailer, and for the factor that coils can pack a punch if they get loose.

The new Doonan® custom 48' x 96" Black Gold™ coil haul trailer advanced design cradles coils shotgun style (where the eye of the coil faces forward), inside a recessed well. The innovative well design provides a low center of gravity for better trailer stability and more secure transport of coils.

INNOVATIVE DOONAN® DESIGN

Doonan® has engineered the coil well closer to the axles, in order to transfer more weight onto the trailer axles. Upon researching, Doonan® found competitor trailers cannot haul as much weight by comparison, because their truck axles become overloaded before the trailer axles are maxed out.



The Black Gold™ coil hauler is designed to have a tarp system installed, so the coils are protected from the elements and arrive safe and secure.



Designers and Builders of Specialized Trailers Since 1974

For over forty years, Doonan® Specialized Trailer, LLC has been dedicated to engineering and producing platform trailers that meet and exceed the specialized needs of owner operators. Our product lines include custom flatbeds, drop decks, double drops, oilfield trailers, extendibles, and RGN lowbeds. Our *Best in Class Dealer Network* is committed to helping you with a trailer that fits your specialized need.



DOONAN® SPECIFICATIONS

FLATBED COIL HAULER

Specifications	110,000 (GVWR)
Model Number	486FCFLTTHFB
Overall Length	48' 0"
Width	96 Inches
Outer Beams	Outer Perimeter Beam in Coil Area
Neck	Flatbed - Normal Neck Height
Rear Deck Height	54 Inches
Fifth Wheel Height	49 Inches
King Pin Setting	20 Inches
Paint	Black (Standard)
Pockets	9 Custom Pockets Each Side for Tarp System
Suspension Type	INTRAAAX
Number of Axles	3 Axles
Axle Spacing	61 inches – Set to the Rear
Overhang	30 Inches
Sliding Axles	No Sliding Axles
Lift Axle Kits	1 Lift Kit Rear Axle
Hub & Drums	Lightweight Steel Hub/Drum or Cast Hub/Drum
Bearing Lubricant	Oil or Semi Fluid Grease in Hubs
Outer Wheels	22.5" Aluminum or Steel
Inner Wheels	22.5" Aluminum or Steel
Tires	22.5" General or Michelin
Mud Flaps	Single Pair at Rear
ABS	Meritor 4S/2M
Brakes	Spring Brakes with Auto Slack Adjusters
Brake Dust Covers	None Standard
Light Kit	Standard Grote LED
Rear Lights	4-3-4 Standard LED Lights
Conspicuity Tape	On Perimeter Beam
Certificate Holder	Included Standard
FHWA Inspection	Included Standard



Engineered with two outer perimeter beams with 1" x 5" top and bottom flanges, the new Doonan® manufactured trailer features a well opening in the center that measures 19' long x 76" wide, with recessed concave beams to safely secure and haul 3' to 7' diameter coils.

BUILT TOUGH
 ——— TO HAUL YOUR ———
SPECIALIZED LOADS

800.734.0608 • www.Doonan.com

Like us on Facebook • Visit us on YouTube • Member: NTDA & CTEA

36 NE Highway 156 • PO Box 1988 • Great Bend, Kansas 67530 • Telephone (620) 792-6222 • Fax (620) 792-3308

Not all options are compatible with other option combinations. Custom options are available upon request. Doonan® Specialized Trailer, LLC reserves the right to make changes in material, components, design, equipment specifications and trailer models without notice. All visual specifications, representations, and dimension references are based on the latest product offering and are approximations available at the time of publication. At no time will the information contained within this publication be used as a basis for resolving disputes.